

## AC Filter for PCB Mounting in Flat Housing



See below:

### Approvals and Compliances

#### Description

- Line filter in standard and medical version
- 1-stage
- standard attenuation

#### Characteristics

- Cost-saving plastic housing
- Designed for standard applications
- Protection against interference voltage from the mains
- Possible interferences generated in the equipment are strongly attenuated
- For standard applications
- Suitable for use in equipment according to IEC/UL 60950

#### Other versions on request

- Version with wire connection
- Medical version M80

#### References

Alternative: Standard version

#### Weblinks

[pdf data sheet](#), [html data sheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Microsite](#)

#### Technical Data

Ratings IEC	0.5 - 6,5 A @ Ta 40 °C / 250 VAC; 50 Hz
Ratings UL/CSA	0.5 - 6.5 A @ Ta 40 °C / 125 VAC; 60 Hz
Leakage Current	standard < 0.25 mA (250 V / 60 Hz) medical < 5 µA (250 V / 60 Hz)
Dielectric Strength	> 1.7 kVDC between L-N > 2.7 kVDC between L/N-PE Test voltage (2 sec)
Allowable Operation Temperature	-25 °C to 85 °C
Climatic Category	25/085/21 acc. to IEC 60068-1
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	For PCB mounting, tin-plated
Material: Housing	Thermoplastic, black, UL 94V-0

Line Filter	Standard and Medical Version, IEC 60939, UL 1283, CSA C22.2 no. 8 <a href="#">Technical Details</a>
MTBF	> 200'000h acc. to MIL-HB-217 F

#### Approvals and Compliances



Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

**Approvals**







The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: FPP2

Approval Logo	Certificates	Certification Body	Description
	VDE Approvals	VDE	Certificate Number: 40004673
	UL Approvals	UL	UL File Number: E72928



**Product standards**

Product standards that are referenced

Organization	Design	Standard	Description
	Designed according to	IEC 60320-1	Appliance couplers for household and similar general purposes
	Designed according to	IEC 60939	Passive filters for suppressing electromagnetic interference
	Designed according to	UL 498	Standard for Attachment Plugs and Receptacles
	Designed according to	UL 1283	Electromagnetic interference filters
	Designed according to	CSA C22.2 no. 42	General Use Receptacles, Attachment Plugs, and Similar Wiring Devices
	Designed according to	CSA C22.2 no. 8	Electromagnetic interference (EMI) filters






**Application standards**

Application standards where the product can be used

Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technology equipment.
	Designed for applications acc.	IEC 60601-1	Medical electrical equipment - Part 1: General requirements for basic safety and essential performance


**Compliances**

The product complies with following Guide Lines


Identification	Details	Initiator	Description
	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/836
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.
	Medical Equipment	SCHURTER AG	Suitable for use in medical equipment according to IEC/UL 60601-1

**Dimension [mm]**

Case 27P

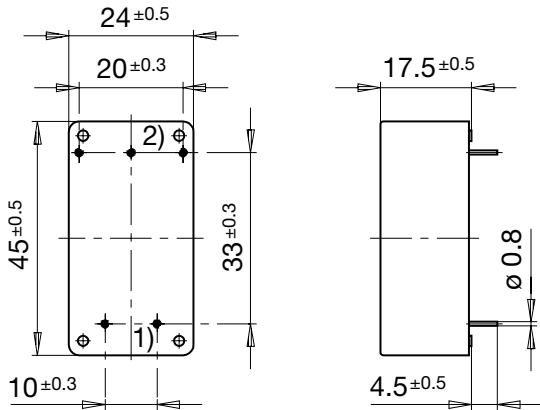


Case 27-1P

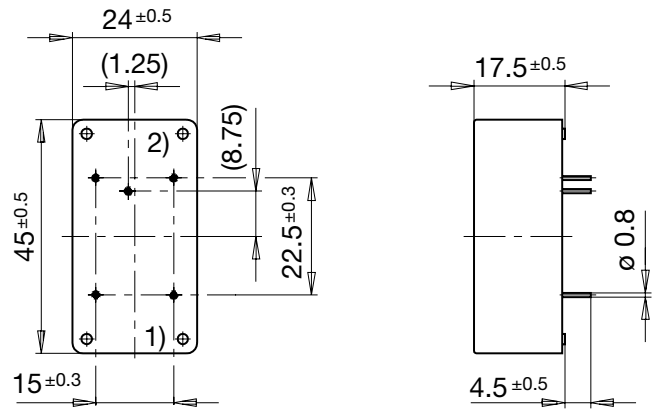

1) Line  
 2) Load


**Diagrams**

S2 standard version

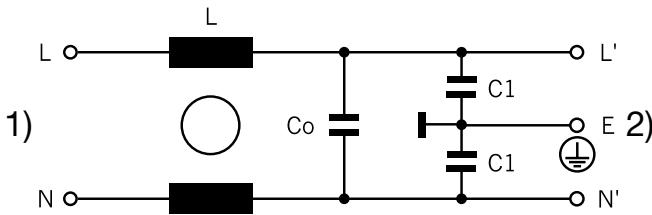


1) Line  
 2) Load

S3 standard version

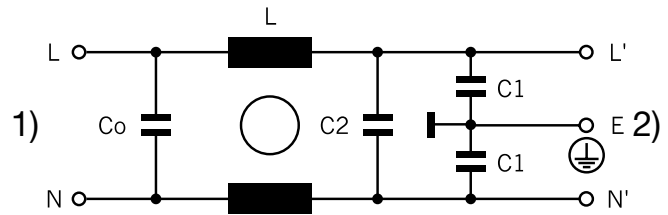


1) Line  
 2) Load

S4 medical version

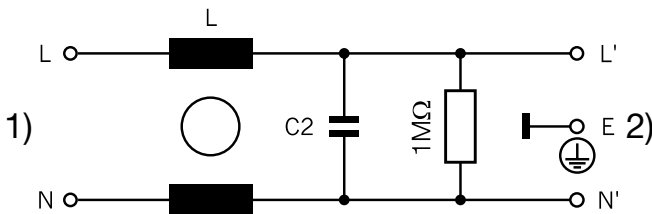

1) Line  
 2) Load

S5 medical version

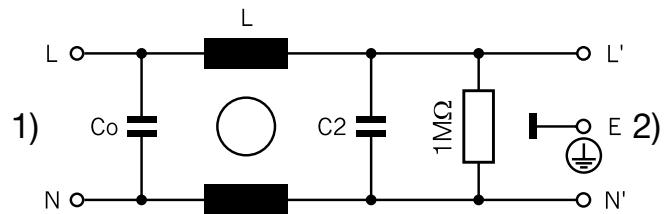


1) Line  
 2) Load


## Attenuation Loss

--- 50Ω differential mode    \_\_\_ 50Ω common mode

Standard version

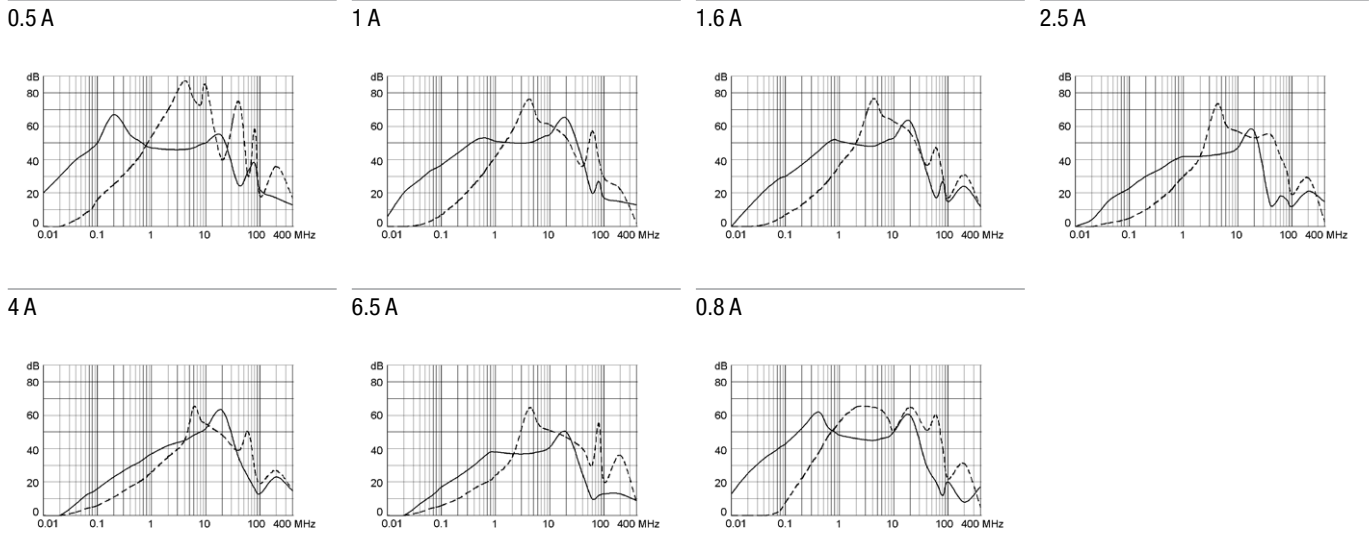

Medical version (M5)

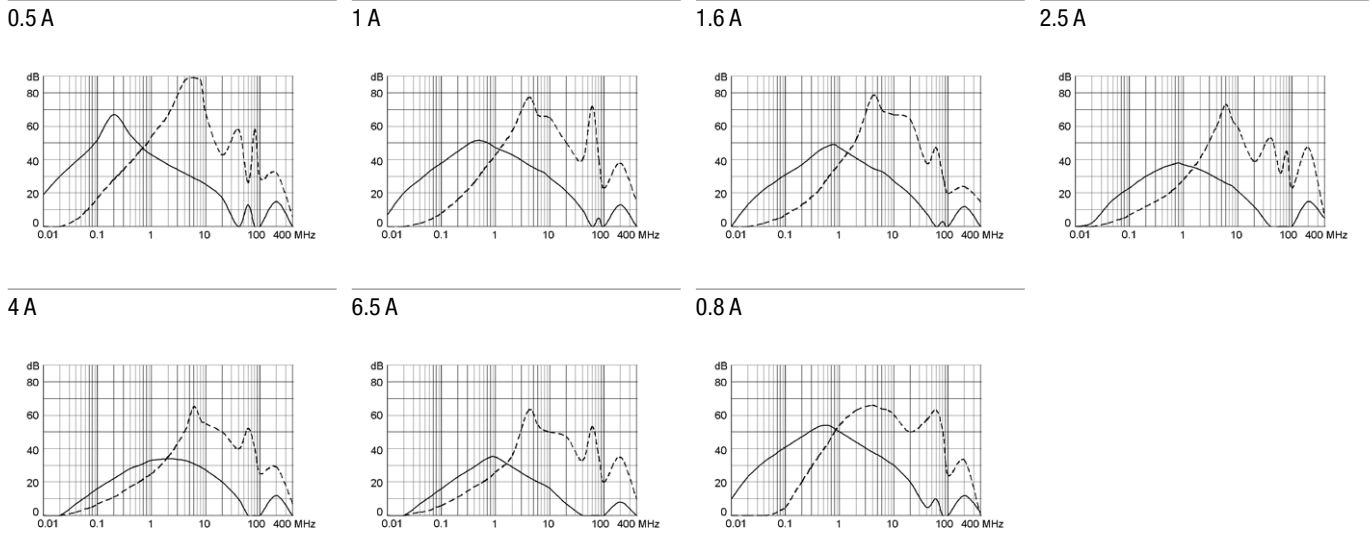

## All Variants

Rated Current [A]	Filter-Type	L [mH]	Co / C2 (X2) [μF]	C1 (Y2) [nF]	Diagram	Weight [g]	Housings	Order Number
0.8	Standard Version	2 x 20	0.068/0.015	2.2	S3	32 g	27-1P	<a href="#">5500.2020</a>
0.5	Standard Version	2 x 40	0.1	2.2	S2	32 g	27P	<a href="#">5500.2014</a>
1	Standard Version	2 x 10	0.1	2.2	S2	32 g	27P	<a href="#">5500.2015</a>
1.6	Standard Version	2 x 6	0.1	2.2	S2	32 g	27P	<a href="#">5500.2016</a>
2.5	Standard Version	2 x 2	0.1	2.2	S2	32 g	27P	<a href="#">5500.2017</a>
4	Standard Version	2 x 1	0.1	2.2	S2	32 g	27P	<a href="#">5500.2018</a>
6.5	Standard Version	2 x 1	0.1	2.2	S2	32 g	27P	<a href="#">5500.2019</a>
0.8	Medical Version (M5)	2 x 20	0.068/0.015	-	S5	38 g	27-1P	<a href="#">5500.2129</a>
0.5	Medical Version (M5)	2 x 40	0.1	-	S4	32 g	27P	<a href="#">5500.2127</a>
1	Medical Version (M5)	2 x 10	0.1	-	S4	32 g	27P	<a href="#">5500.2130</a>
1.6	Medical Version (M5)	2 x 6	0.1	-	S4	32 g	27P	<a href="#">5500.2131</a>
2.5	Medical Version (M5)	2 x 2	0.1	-	S4	32 g	27P	<a href="#">5500.2132</a>
4	Medical Version (M5)	2 x 1	0.1	-	S4	32 g	27P	<a href="#">5500.2133</a>
6.5	Medical Version (M5)	2 x 1	0.1	-	S4	38 g	27P	<a href="#">5500.2128</a>

Most Popular.

---

Rated Current [A]	Filter-Type	L [mH]	Co / C2 (X2) [μF]	C1 (Y2) [nF]	Diagram	Weight [g]	Hou- sings	Order Number
----------------------	-------------	--------	----------------------	--------------	---------	------------	---------------	--------------

---

Availability for all products can be searched real-time:<https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

---

<b>Packaging unit</b>	70 Pcs
-----------------------	--------

---