

Solid State, Thin Film, SMD 1206 Fuse for Space Application, ESCC QPL Listed

new



125 VAC · 125 VDC · Super-Quick-Acting FF

See below:

[Approvals and Compliances](#)**Description**

- ESCC QPL Listed, see [www.escies.org](http://www.escies.org)
- Full data sheet available on request
- Hermetically sealed, robust and smallest construction with high breaking capacity up to 300 A

**Unique Selling Proposition**

- ESA ESCC QPL (Qualified Parts List)
- SnPb finish - effective whisker growing barrier
- Extensive control and screening procedures during production

**Applications**

- Applications where highest reliability and availability is needed
- Space

**References**Alternative: Standard version [MGA](#)**Weblinks**

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Packaging details](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Landing Page](#)

**Technical Data**

Rated Voltage	32 - 125 VAC, 125 VDC
Rated current	0.14 - 3.5 A
Breaking Capacity	50 A - 300 A
Characteristic	Super-Quick-Acting FF
Mounting	PCB,SMT
Admissible Ambient Air Temp.	-55 °C to 150 °C
Climatic Category	55/150/21 acc. to IEC 60068-1
Material: Housing	Ceramic
Material: Terminals	Tin-Plated Copper Alloy (with lead)
Unit Weight	0.035 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Variant Code

Soldering Methods	Reflow, Wave <a href="#">Soldering Profile</a>
Solderability	235 °C / 2 sec acc. to IEC 60068-2-58, Test Td
Resistance to Soldering Heat	260 +0/-5 °C / 10 sec acc. to IEC 60068-2-58, Test Td
Moisture Sensitivity Level	MSL 1, J-STD-020



**Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.


**Product standards**

Product standards that are referenced

Organization	Design	Standard	Description
	Designed according to	ESCC Basics Specification Nr. 4008	This specification defines the general requirements for the qualification, qualification maintenance, procurement, and delivery of fuses for space applications. This specification contains the appropriate inspection and test schedules and also specifies the data documentation requirements.
	Designed according to	ESCC Detail Specification Nr. 4008/001	This specification details the ratings, physical and electrical characteristics and test and inspection data for the component type variants and/or the range of components specified below.





### Application standards

Application standards where the product can be used


Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technology equipment.

### Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
	<a href="#">CE declaration of conformity</a>	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.
	Avionics and Space	ECSS	Qualified according to ECSS Generic Specification 4008 and associated detail specification 4008/001 as recommended by the Space Components Steering Board


### Dimension [mm]

 3.2 mm

Reflow soldering pads



### Derating Curves

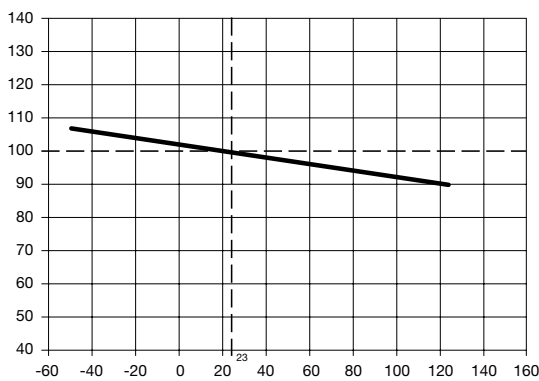


### Pre-Arcing Time

Rated Current  $I_n$     1.43 x  $I_n$  min.    3.58 x  $I_n$  min.    3.58 x  $I_n$  max.    5.71 x  $I_n$  min.    5.71 x  $I_n$  max.    8.57 x  $I_n$  min.    8.57 x  $I_n$  max.

0.14 A - 3.5 A	4 h	2 ms	5 s	500 us	10 ms	50 us	2 ms
----------------	-----	------	-----	--------	-------	-------	------

### Time-Current-Curves















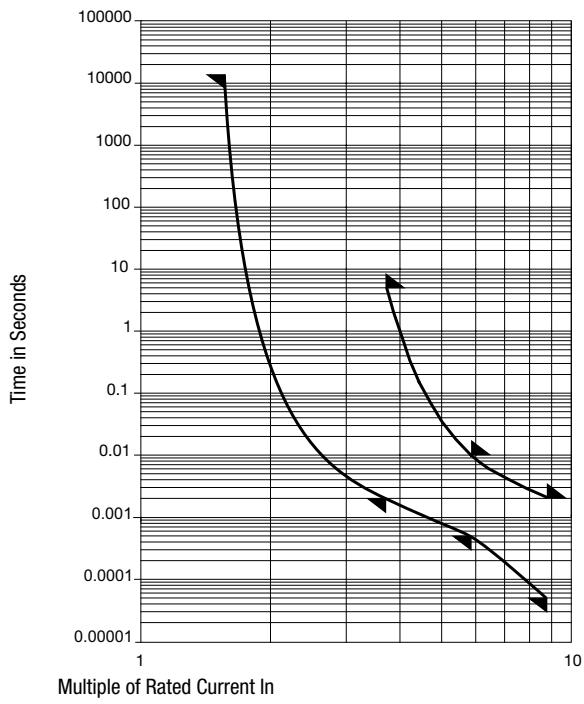


ESCC GENERIC SPECIFICATION N° 4008

PRODUCTION

CHART F2 - PRODUCTION CONTROL

CHART F3 - SCREENING TESTS

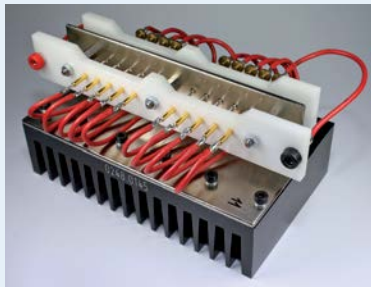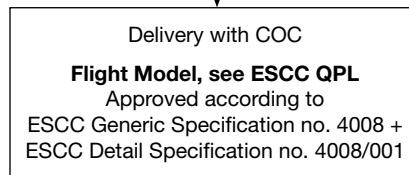

Test Equipment for Burn-In

All Variants

Rated Current [A]	Rated Voltage [VAC]	Rated Voltage [VDC]	Breaking Capacity	Voltage Drop 1.43 In typ. [mV]	Cold Resistance typ. [mΩ]	Melting I <sup>2</sup> t 5.71 In typ. [A <sup>2</sup> s]	ESCC Component Number	Order Number
0.14	125	125	1)	258	1020	0.0008	400800101	<a href="#">3410.0310</a>
0.175	125	125	1)	250	800	0.0009	400800102	<a href="#">3410.0311</a>
0.262	125	125	1)	165	361	0.0037	400800103	<a href="#">3410.0312</a>
0.35	125	125	1)	150	247	0.0042	400800104	<a href="#">3410.0313</a>
0.525	125	125	1)	100	115	0.01	400800105	<a href="#">3410.0314</a>
0.7	125	125	1)	124	98.7	0.035	400800106	<a href="#">3410.0315</a>
1.05	125	125	1)	105	56	0.064	400800107	<a href="#">3410.0316</a>
1.4	125	125	1)	98	39	0.089	400800108	<a href="#">3410.0317</a>
1.75	125	125	1)	90	29.5	0.15	400800109	<a href="#">3410.0318</a>
2.1	125	125	1)	88	24.1	0.18	400800110	<a href="#">3410.0319</a>
2.8	63	125	2)	83.5	17	0.23	400800111	<a href="#">3410.0320</a>
3.5	32	125	3)	90	13.5	0.45	400800112	<a href="#">3410.0321</a>

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

- 1) 50 A @ 125 VAC / 300 A @ 125 VDC
- 2) 50 A @ 63 VAC / 50 A @ 125 VDC / 300 A @ 32 VDC
- 3) 50 A @ 32 VAC / 50 A @ 125 VDC / 300 A @ 32 VDC

**Packaging Unit** Blister Tape on 18 cm Reel in ESD Plastic Bag