

PB 1101 Test Jack, PCB Mounting, Ø 2 mm, 10 A



See below:

**Approvals and Compliances**

**Description**

- PCB Mounting
- Test Jack , Diameter 2.0 mm
- measuring and testing during operation
- Open, close with test probe
- Resilient contacts, gold plated

**Weblinks**

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

**Technical Data**

Diameter	2mm	Solderability	235 °C / 2 sec acc. to IEC 60068-2-20 , Test Ta, method 1
Rated current	10A	Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2-20 , Test Tb, method 1A
Admissible switching power	@ 100 Insertions: 110 W / max. 2 A or 75 VDC 150 W / max. 5 A or 50 VAC	Weight	0.5g
Contact resistance	< 7 mΩ at 20 mV	Material: Housing	Thermoplastic (PC), UL 94V-2
Insulation Resistance	> 5 MΩ ( 500VDC: 1 min)	Surface of contacts	gold plated , Thickness 0.5 μm
Dielectric strength	> 3kV ( 50Hz: 1 min)		
Allowable Operation Temperature	-25 °C to 70 °C		


**Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.




**Application standards**

Application standards where the product can be used


Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technology equipment.

**Compliances**

The product complies with following Guide Lines

Identification	Details	Initiator	Description
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/836
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimensions [mm]

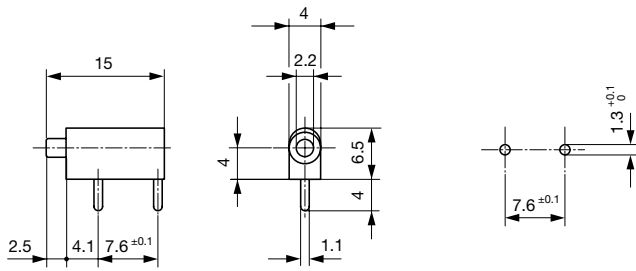

All Variants

Product group	Color	Order Number
Test Jack	black	0040.1101
Test Jack	red	0040.1102

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs

Mating Inlets/Plugs

Category / Description



[Test Jacks & Probes Overview complete](#)

PS 1061, 10 A, Test Probe

PS 1061

[Test Jacks & Probes further types to PB 1101](#)