

Miniature Fuse, 6.3 x 32 mm, Quick-Acting F, GAM T1, 250 VAC, 125 VDC



250 VAC · 125 VDC · Quick-Acting F

See below:
[Approvals and Compliances](#)

Description

- High breaking capacity


References

Corresponding Fuseholder

Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Packaging details](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

| | |
|------------------------------|--|
| Rated Voltage | 250VAC, 125VDC |
| Rated current | 0.16 - 20A |
| Breaking Capacity | 1 kA - 10kA |
| Characteristic | Quick-Acting F |
| Mounting | Fuseholder / Clip |
| Admissible Ambient Air Temp. | -40 °C to 125 °C |
| Climatic Category | 40/125/56 acc. to IEC 60068-1 |
| Material: Tube | Ceramics |
| Unit Weight | 3 g |
| Storage Conditions | 0 °C to 60 °C, max. 70% r.h. |
| Product Marking |  , Rated current, Rated Voltage, HA39 |

| | |
|-------------------------|--|
| Resistance to Vibration | acc. to NF C 20-706 / IEC 60068-2-6, test Fc |
| Shocks | acc. to NF C 20-706 / IEC 60068-2-27 |
| Bumps | acc. to NF C 20-729 / IEC 60068-2-29 |
| Salt Mist | acc. to NF C 20-711 / IEC 60068-2-11 |

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals


The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type:

| Approval Logo | Certificates | Certification Body | Description |
|---|--------------|--------------------|-------------|
| GAM T1 | | | |
|  | | | |





Application standards

Application standards where the product can be used


| Organization | Design | Standard | Description |
|---|--------------------------------|--------------|---|
|  | Designed for applications acc. | IEC/UL 60950 | IEC 60950-1 includes the basic requirements for the safety of information technology equipment. |

Compliances

The product complies with following Guide Lines

| Identification | Details | Initiator | Description |
|--|--|-------------|---|
|  | CE declaration of conformity | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | RoHS | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863 |
|  | China RoHS | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS. |
|  | REACH | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |

Dimension [mm]  32 mm

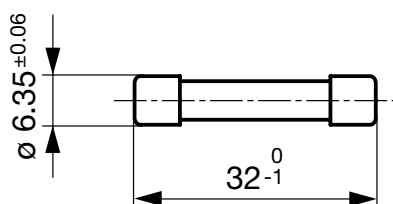


Pre-Arcing Time

Rated Current I_n 1.1 x I_n min. 1.7 x I_n max. 3.0 x I_n max.

| | | | |
|---------------|--------|--------|------|
| 0.16 A - 20 A | 60 min | 60 min | 10 s |
|---------------|--------|--------|------|

Time-Current-Curves

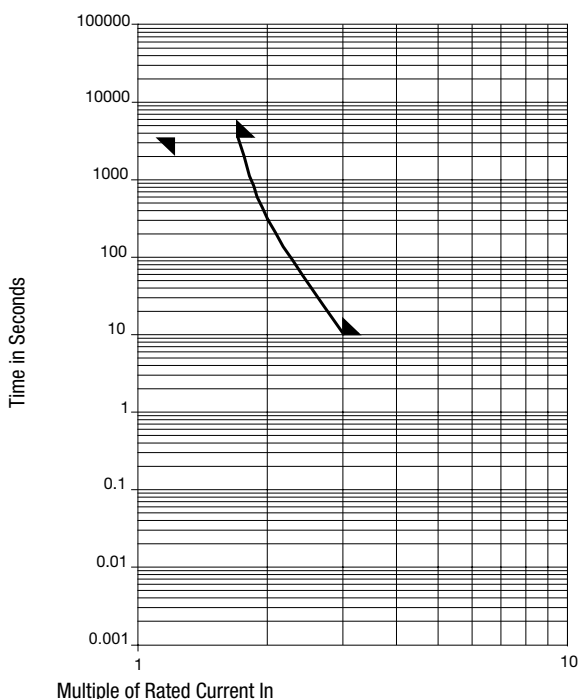

All Variants

| Rated Current [A] | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop 1.0 I _n typ. [mV] | Power Dissipation 1.1 I _n typ. [mW] | Melting I ² t 10.0 I _n typ. [A ² s] | GAM T1 | NNO | Order Number |
|-------------------|---------------------|---------------------|-------------------|---|--|--|--------|-----|--------------|
| 0.16 | 250 | 125 | 1) | 3000 | 770 | 0.0021 | ● | | 7023.0790 |
| 0.25 | 250 | 125 | 1) | 2290 | 870 | 0.0075 | ● | | 7023.0810 |
| 0.4 | 250 | 125 | 1) | 1800 | 1000 | 0.01 | ● | | 7023.0830 |
| 0.63 | 250 | 125 | 1) | 1050 | 1050 | 0.44 | ● | ● | 7023.0850 |
| 1 | 250 | 125 | 1) | 770 | 1170 | 0.16 | ● | | 7023.0870 |
| 1.6 | 250 | 125 | 1) | 540 | 1350 | 0.74 | ● | ● | 7023.0890 |
| 4 | 250 | 125 | 1) | 220 | 1300 | 24 | ● | | 7023.0930 |
| 6.3 | 250 | 125 | 1) | 310 | 3100 | 27 | ● | | 7023.0950 |
| 8 | 250 | 125 | 1) | 90 | 1050 | 9.3 | ● | | 7023.0960 |
| 10 | 250 | 125 | 1) | 85 | 1350 | 34 | ● | ● | 7023.0970 |
| 12.5 | 250 | 125 | 1) | 90 | 1600 | 62 | | | 7023.0980 |
| 16 | 250 | 125 | 1) | 80 | 1900 | 160 | | | 7023.0990 |
| 20 | 250 | 125 | 1) | 75 | 2000 | 240 | | | 7023.0940 |

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 10 kA @ 250 VAC , p.f. = 0.7 - 0.8 / 1 kA @ 125 VDC

Packaging Unit Small Box Pack (10 pcs.)